

Crompton



**Crompton
Water Heaters**



Crompton Appliances

Crompton Greaves Limited Appliances Division

Equinox Business Park, Tower 3, 1st Floor,
LBS Marg, Kurla (West), Mumbai - 400 070. Tel.: +91-22-61678370.
Registered Office: CG House, 6th Floor,
Dr. Annie Besant Road, Worli, Mumbai - 400 030.

After Sales Service

 **1800 - 419 - 0505**

E-mail : custcare.app@cgglobal.com

Website : www.cgglobal.com

Visit us




*Images are for illustrative purposes only. Actual product may vary. Design & Specifications are subjected to change without prior notice.

Rediscover Yourself Everyday with Crompton Water Heaters

Why people prefer our water heaters !!!

- First in the world to provide patented Nano polymer coated inner tanks using advanced robotic automation. Technology provides lead free performance, maximum hygiene and unmatched corrosion protection
- First in the industry to pioneer and use injected PUF (poly urethane foam) to provide superior efficiency and better performance
- First in the industry to develop and use eco friendly bio degradable foam for packaging
- Only company in the industry who has designed and are able to supply water heaters withstanding 10 Bar pressure. Suitable for high rising buildings and pressure pump applications

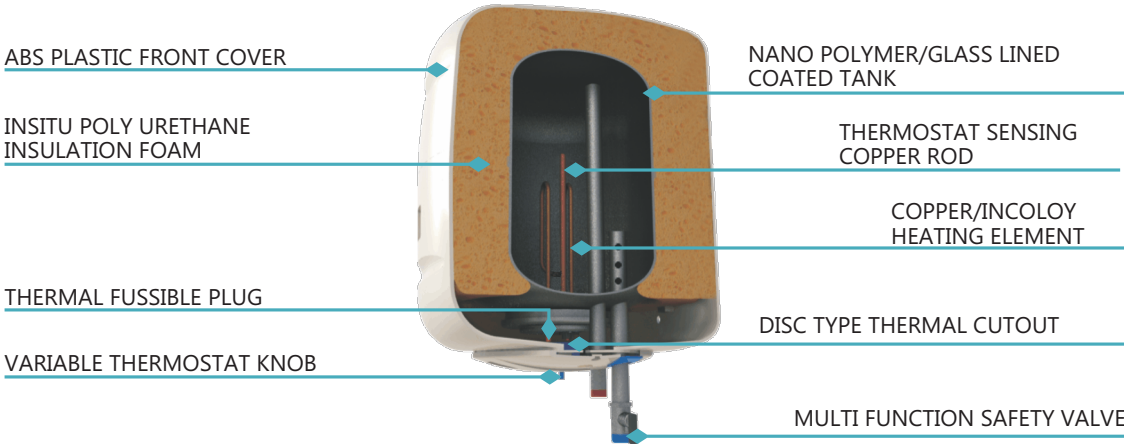

STORAGE				
Model	Capacity	Series No	Warranty (X,Y,Z) X: Tank, Y: Element, Z: Product	Star ratings As on 1st July 2015
Solarium Aura	10,15,25	1310, 1315, 1325	7,3,2	5 Star Energy savings: 59.5%
Magna	10,15,25	1010, 1015, 1025	7,3,2	5 Star Energy savings: 59.5%
Arno Dlx	10,15,25	1410, 1415, 1425	5,3,2	5 Star Energy savings: 59.5%
Spectrum	10,15,25	910S, 915S, 925S	5,2,2	5 Star Energy savings: 59.5%
Solarium	6,10,15,25	806, 810, 815, 825	5,2,2	4 Star Energy savings: 55.4%
Arno	6,10,15,25	606, 610, 615, 625	5,2,2	4 Star Energy savings: 55.4%
Radiant	15,25	415, 425	5,2,2	4 Star Energy savings: 55.4%
Radiant	6,10,35,50	406, 410, 435, 450	5,2,2	2 Star Energy Saving: 46%
Arno Horizontal	15,25	615 HZ, 625HZ	5,2,2	2 Star Energy Saving: 46%
Arno Power	15,25	1515, 1525	5,2,2	2 Star Energy Saving: 46%
INSTANT				
Model	Capacity	Series No	Warranty	
Solarium Plus	1,3	01PC1, 03PC1	2 Years on product	



Industry's only SUPERIOR "high dense"
PUF OPTIMIZER Technology which ensures 59% energy savings



Model	SWH1310	SWH1315	SWH1325
Capacity (Litres)	10	15	25
Input(kw)	2	2	2
Length (mm)	495	525	705
Width (mm)	295	340	340
Height (mm)	295	340	340
Weight Kg (approx.)	7.8	9.4	13

SOLARIUM AURA (10, 15, 25 litres)



8 Bar Pressure
Suitable for high rise buildings
and pressure pump applications



Single Weld Line
Single weld joint reduces chances
of tank leakage upto 66%



Rust Free ABS Body
Outer body is made of high grade
specialised ABS to ensure rust free body



Best in Class Technology
Liquid particle based patented nano polymer tanks
provides unmatched protection against rusting and corrosion



Advanced 3 Tier Safety
3 layers of temperature sensing with capillary thermostat,
fusible plug and cut out provides highest safety
against accidents



Incoloy Heating Element
Incoloy heating element provides superior protection
against scale formation



Industry's only SUPERIOR "high dense"
PUF OPTIMIZER Technology which ensures 59% energy savings



Model	SWH1410	SWH1415	SWH1425
Capacity (Litres)	10	15	25
Input(kw)	2	2	2
Length (mm)	440	507	675
Width (mm)	295	310	345
Height (mm)	295	310	360
Weight Kg (approx.)	5.9	7.6	11.7

ARNO DLX (10, 15, 25 litres)



8 Bar Pressure
Suitable for high rise buildings
and pressure pump applications



Single Weld Line
Single weld joint reduces chances
of tank leakage upto 66%



Rust Free ABS Body
Outer body is made of high grade
specialised ABS to ensure rust free body



Best in Class Technology
Liquid particle based patented nano polymer tanks
provides unmatched protection against rusting and corrosion



Advanced 3 Tier Safety
3 layers of temperature sensing with capillary thermostat,
fusible plug and cut out provides highest safety
against accidents



Incoloy Heating Element
Incoloy heating element provides superior protection
against scale formation

New Arrival

SPOT Technology

Industry's only SUPERIOR "high dense" PUF OPTIMIZER Technology which ensures 59% energy savings

59.5% less energy consumption

More Star More Savings

7 YEARS WARRANTY On Inner Tank

3 YEARS WARRANTY On Heating Element



Model	SWH1010	SWH1015	SWH1025
Capacity (Litres)	10	15	25
Input(kw)	2	2	2
Length (mm)	530	605	635
Width (mm)	285	350	390
Height (mm)	295	330	375
Weight Kg (approx.)	8.1	9.2	11.3

05

- 

Sleek Design and Finish
Sleek design with metallic finished silver flap to enrich the look of your bathroom
- 

10 Bar Pressure
Suitable for all kind of applications from high rise buildings to pressure pumps
- 

Incoloy Enameled Heating Element
Glasslined incoloy heating element provides superior protection against scale formation to extend the life
- 

Best in Class Technology
Patented nano polymer technology to provide unmatched tank protection against corrosion
- 

Rust Free ABS Body
High grade ABS ensures rust free performance of the outer body
- 

Advanced Dual Temperature Sensing
Capillary thermostat, thermal cut to provide higher safety against accidents
- 

Multifunctional Safety Valve
4 layers of superior safety with multifunctional valve

46% lesser energy consumption

More Stars More Savings

5 YEARS WARRANTY On Inner Tank

2 YEARS WARRANTY On Product



New Arrival

Model	SWH1515	SWH1525
Capacity (Litres)	10	15
Input(kw)	2	2
Length (mm)	530	675
Width (mm)	310	320
Height (mm)	310	320
Weight Kg (approx.)	7.7	11.8

- 

8 Bar Pressure
Suitable for high rise buildings and pressure pump applications
- 

Patented Nano Polymer Coated Tank
Nano particles provide uniform coating to ensure negligible pin holes to maximize tank protection
- 

Single Weld Line
Tank is designed with single weld line to minimize leakage by 66%
- 

Energy Saving Insitu PUF
Insitu PUF will minimize radiant heat loss and save your energy bills
- 

Advanced 3 Tier Temperature Sensing
Capillary thermostat, thermal cut out, fusible plug to provide higher safety against accidents
- 

Special Type Heating Element
ISI marked nickel coated copper to provide resistance against salts and corrosive particles

46% lesser energy consumption

5 YEARS WARRANTY

On Inner Tank

2 YEARS WARRANTY

On Product

New Arrival



Model	SWH615 HZ/FLR	SWH625 HZ/FLR
Capacity (Litres)	15	25
Input(kw)	2	2
Length (mm)	315	315
Width (mm)	690	980
Height (mm)	315	315
Weight Kg (approx.)	10.8	15.1

07

ARNO Hz (15, 25 litres)



8 Bar Pressure

Suitable for high rise buildings and pressure pump applications



Patented Nano Polymer Coated Tank

Nano particles provide uniform coating to ensure negligible pin holes to maximize tank protection



Energy Saving Insitu PUF

Insitu PUF will minimize radiant heat loss and save your energy bills



Dual Temperature Sensing

Capillary thermostat and thermal cut out provide dual safety against temperature shoot up



Rust Free Plastic Body

High grade plastic ensures rust free performance of the outer body



Special Type Heating Element

ISI marked nickel coated copper to provide resistance against salts and corrosive particles



Multifunctional Safety Valve

4 layers of superior safety with multifunctional valve

59.5% less energy consumption

5 YEARS WARRANTY

On Inner Tank

2 YEARS WARRANTY

On Heating Element



Model	SWH910S	SWH915S	SWH925S
Capacity (Litres)	10	15	25
Input(kw)	2	2	2
Length (mm)	432	460	550
Width (mm)	280	324	365
Height (mm)	283	320	360
Weight Kg (approx.)	6.4	9.1	11.1

08

SPECTRUM (10, 15, 25 litres)



8 Bar Pressure

Suitable for high rise buildings and pressure pump applications



Single Weld Line

Single weld joint reduces chances of tank leakage upto 66%



Rust Free ABS Body

Outer body is made of high grade specialised ABS to ensure rust free body



Glass Lined Technology

Glass Lined tank maximizes tank protection from hard water and corrosion



Dual Layer of Advanced Safety


Capillary thermostat and thermal cut out will provide 2 layers of safety against temperature shoot ups and accidents



Incoloy Heating Element

Incoloy heating element provides superior protection against scale formation

Best Buy Based on Performance-
Consumer Voice*



Model	SWH806	SWH810	SWH815	SWH825
Capacity (Litres)	6	10	15	25
Input(kw)	2	2	2	2
Length (mm)	298	307	350	375
Width (mm)	285	285	320	325
Height (mm)	416	512	505	635
Weight Kg (approx.)	6.5	7.9	9.5	13.1

2013*

SOLARIUM DLX (6, 10, 15, 25 litres)



Compact and Elegant
Unique design brings unmatched elegance



8 Bar Pressure
Suitable for high rise buildings and pressure pump applications



Single Weld Line
Tank is designed with single weld line to minimize leakage by 66%



Special Type Heating Element
ISI marked nickel coated copper to provide resistance against salts and corrosive particles



Best in Class Technology
Patented nano polymer technology to provide unmatched tank protection against corrosion



Rust Free ABS Body
High grade ABS ensures rust free performance of the outer body



Advanced 3 Tier Temperature Sensing
Capillary thermostat, thermal cut out, fusible plug to provide higher safety against accidents



Model	SWH606	SWH610	SWH615	SWH625
Capacity (Litres)	6	10	15	25
Input(kw)	2	2	2	2
Length (mm)	295	295	372	372
Width (mm)	270	270	352	352
Height (mm)	415	540	525	675
Weight Kg (approx.)	5.9	7.3	9.4	11.9

ARNO (6, 10, 15, 25 litres)



8 Bar Pressure
Suitable for high rise buildings and pressure pump applications



Patented Nano Polymer Coated Tank
Nano particles provide uniform coating to ensure negligible pin holes to maximize tank protection



Single Weld Line
Tank is designed with single weld line to minimize leakage by 66%



Energy Saving Insitu PUF
Insitu PUF will minimize radiant heat loss and save your energy bills



Advanced 3 Tier Temperature Sensing
Capillary thermostat, thermal cut out, fusible plug to provide higher safety against accidents



Rust Free Plastic Body
High grade plastic ensures rust free performance of the outer body



Special Type Heating Element
ISI marked nickel coated copper to provide resistance against salts and corrosive particles



Model	IWH01PC1	IWH03PC1
Capacity (Litres)	1	3
Input(kw)	3/4.5	3/4.5
Length (mm)	190	210
Width (mm)	190	210
Height (mm)	348	425
Weight Kg (approx.)	2.0	3.3

SOLARIUM Plus (1, 3 litres)



6.5 Bar Pressure
Class 1 complaint



Heating Element
Special type copper to provide quicker heating and reducing scale formation



Rust Free Plastic Body
High grade plastic ensures rust free performance of the outer body



Safety Devices
Pressure relief valve, drain nut, fusible plug thermal cut out , non return valve



IMMERSION ROD



Easy Repairing



Light Weight



Water Level Indicator



Indicator Lamp